

TECHNICAL CORNER


CONNECTING THE SE-200 TO A FURUNO UNIT

Connection of the SE-200 Sonar Engine to the input of a Furuno NavNet display utilizing a Furuno 008-523-070 video interface requires an additional accessory- a VGA to video converter. The Furuno video input requires interlaced video where as the SE-200's video output is non-interlaced. The VGA to video converter does produces the interlaced video which will work with the Furuno video interface.

This conversion box is needed if connecting a Furuno unit to an SE-200. Most units do not require the converter box however, any unit utilizing interlaced video may require it as well.

**CONTACT INTERPHASE SALES DEPARTMENT FOR PRICING AND AVAILABILITY
PART # 23-1016-000**

Specifications and Connections

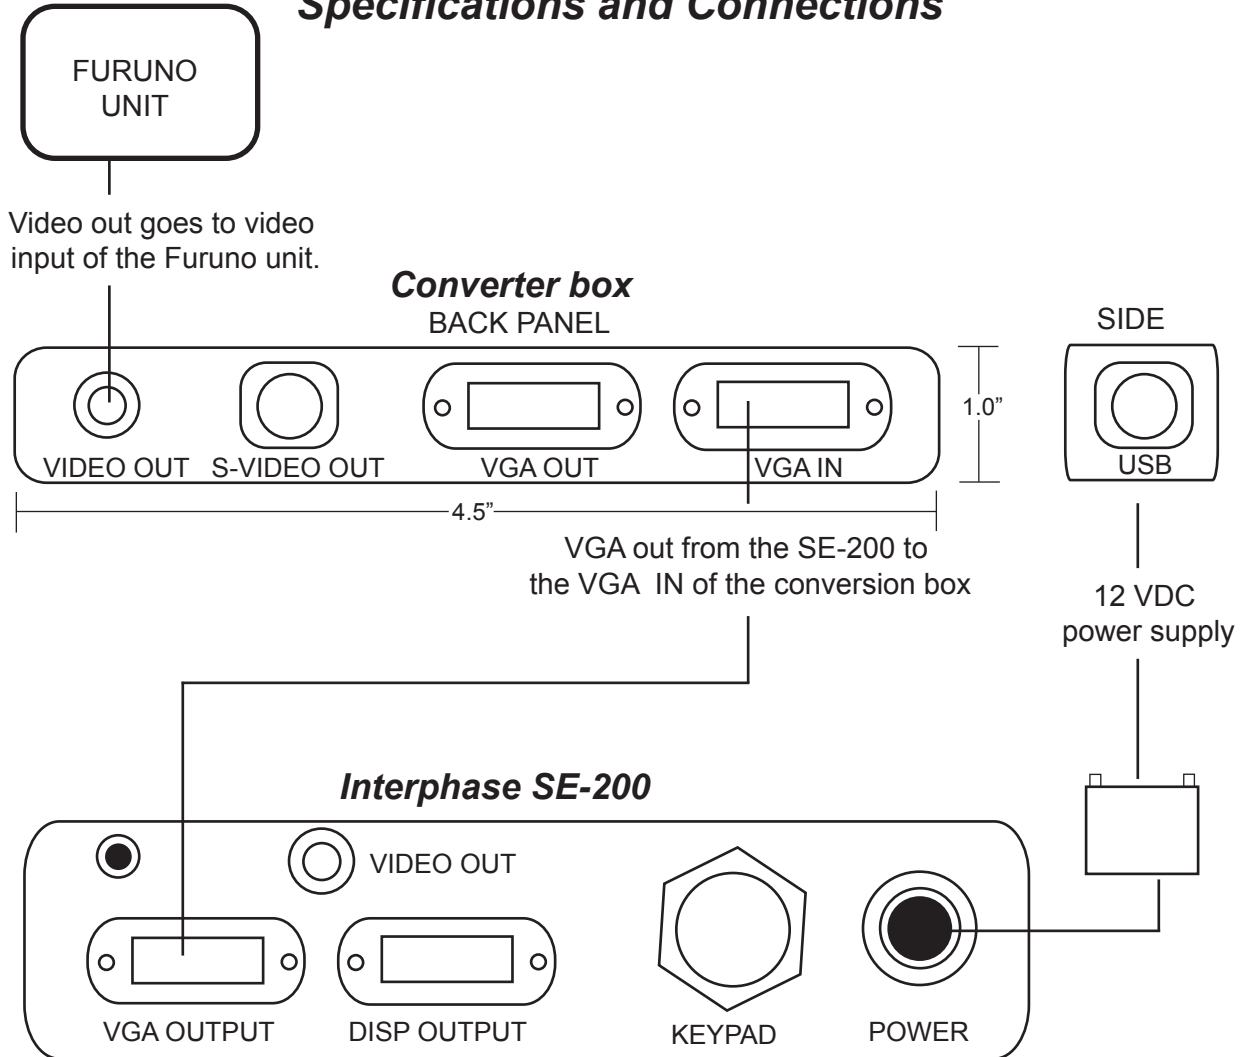

WWW.INTERPHASE-TECH.COM

INTERPHASE TECHNOLOGIES, INC

2880 RESEARCH PARK DR. SUITE 140 SOQUEL CA. 95073

PHONE: 831.477.4944 FAX: 831.462.7444 EMAIL: COMMENTS@INTERPHASE-TECH.COM